


Extras



Tensiometer
with calibration list, also for bladed spokes

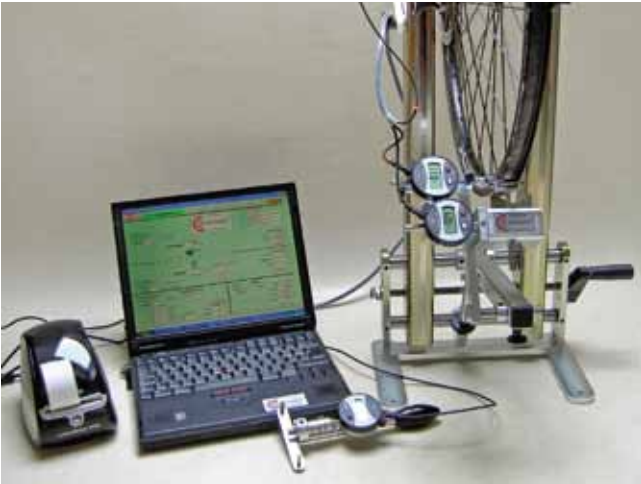

Digital type
Consisting of: Centrimaster Comfort with digital gauges, printer, software, tensiometer
Accessory: brake measuring gauge (without laptop)

www.centrimaster.de

Centrimaster UG (haftungsbeschränkt)
Bruderholzerstr. 3 D-54655 St. Thomas
Tel.: +49 (0) 65 63 / 86 35 Fax: +49 (0) 65 63 / 9 60 11 70
Mail: info@centrimaster.de Web: www.centrimaster.de

Order to fax +49 (0) 65 63 / 9 60 11 70

Qty:

Classic model

.....

Comfort model

.....

Genius model

.....

Extras / accessories

.....

Delivery address

Surname, first name

Street

Town and postcode

Telephone / fax

email


Date, signature




- The new generation of truing stand
- Find the centre straight away
- Get to the centre point immediately
- No calculating (understandable even for laymen)
- 50% time saving
- All gauges with needle adjustment
- Force off in the truing stand

Fly_Centrimaster_08-2010Engl.


Base frame

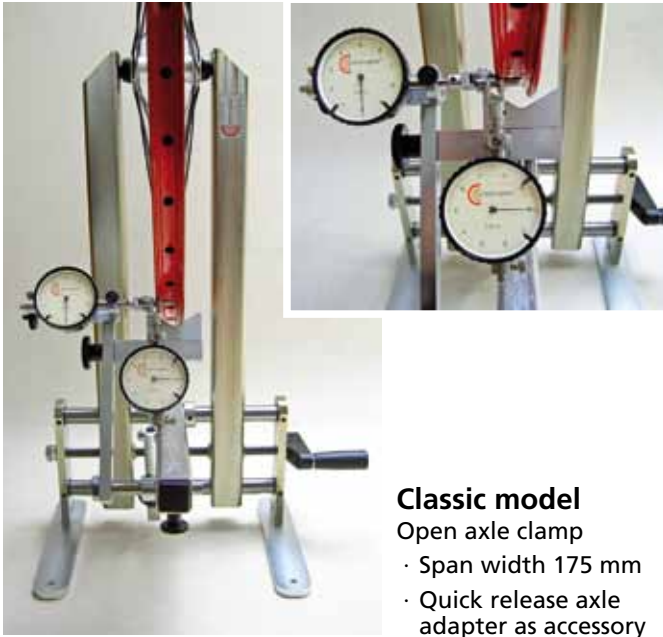

Classic model
Open axle clamp
· Span width 175 mm
· Quick release axle adapter as accessory

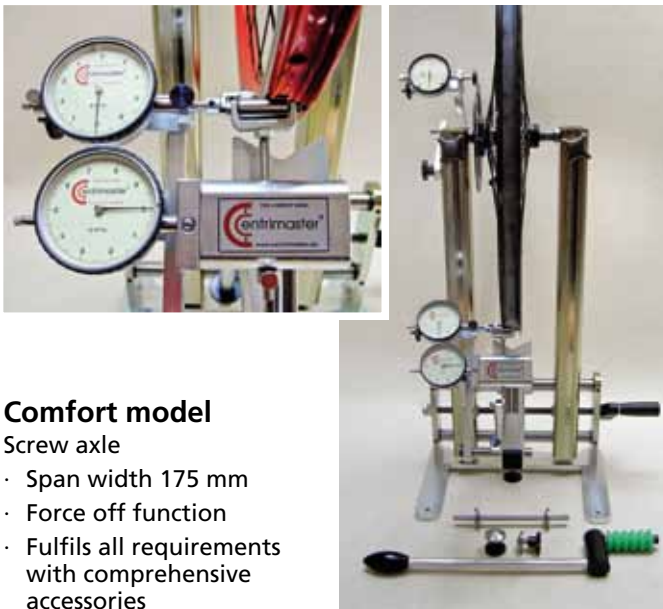

Comfort model
Screw axle
· Span width 175 mm
· Force off function
· Fulfils all requirements with comprehensive accessories

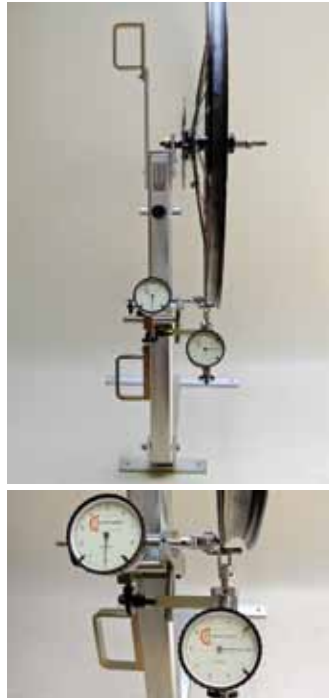

Genius model
· gauges for side and height
· integrated centering gauge
· measure and centre also with cover
· foldable
· also measures brake discs
· with quick release axle adapter



Large gauges
D 80mm
model Comfort and Classic



Motorbike model
Screwable axle clamp
· Span width 300 mm
· with adapter for wheel support
· Brake disc gauge as an accessory
· also suitable for bicycles

Accessories



Brake disc measuring device
only Comfort model



Force off function
only Comfort model



Support for universal quick release axles
up to D 28mm



Rod with cones
Comfort
up to D 28mm
for models
Comfort and Classic



◀ **Bench stand tilting device**



Floor stand tilting device ▶

Attention! All base frames are compatible with the measuring devices
(Genius type is a self-contained system)